




Physical Dimensions : mm (inch)

- A =  $1.6 \pm 0.2$  (0.063 $\pm$ 0.008)
- B =  $0.8 \pm 0.2$  (0.031 $\pm$ 0.008)
- C =  $0.8 \pm 0.2$  (0.031 $\pm$ 0.008)
- D =  $0.3 \pm 0.2$  (0.012 $\pm$ 0.008)

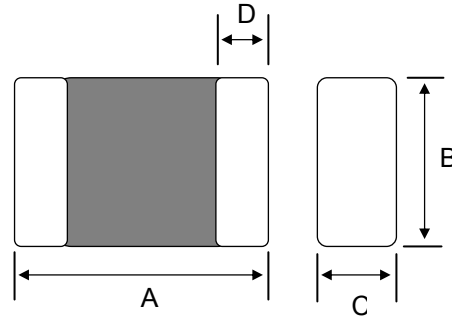

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	600	$\Omega$	$\pm 25\%$	100 MHz / 100 mV
RDC	0.45	$\Omega$	max.	
IDC	200	mA	max.	


Packing Method:

- One Reel = 4,000 pcs
- One Box = 200,000 pcs
- One Box = 9.9 KG

General information :

- Operating Temperature: -55°C to 125°C
- Storage Temperature (on Tape & Reel): 40 max, 70% RH
- Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

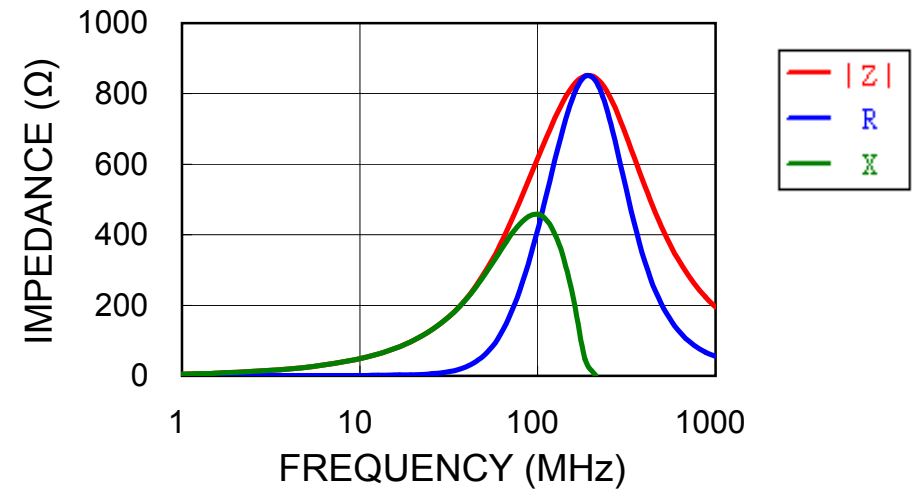

				Multilayer Ferrite Chip Beads	
				P/N	TB 160808 G601
				Version	N000
Ver.	DESCRIPTION	DATE	BY		
N003	0.40 $\Omega$ / 200 mA				
N000	0.45 $\Omega$ / 200 mA				

  
 +886-3-4962286  
 www.tecstar.com.tw