



Physical Dimensions : mm (inch)

A = 1.6 ± 0.2 (0.063 \pm 0.008)

B = 0.8 ± 0.2 (0.031 \pm 0.008)

C = 0.8 ± 0.2 (0.031 \pm 0.008)

D = 0.3 ± 0.2 (0.012 \pm 0.008)



Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	120	Ω	$\pm 25\%$	100 MHz / 100 mV
RDC	0.20	Ω	max.	
IDC	200	mA	max.	

Packing Method:

One Reel = 4,000 pcs

One Box = 200,000 pcs

One Box = 9.9 KG


General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

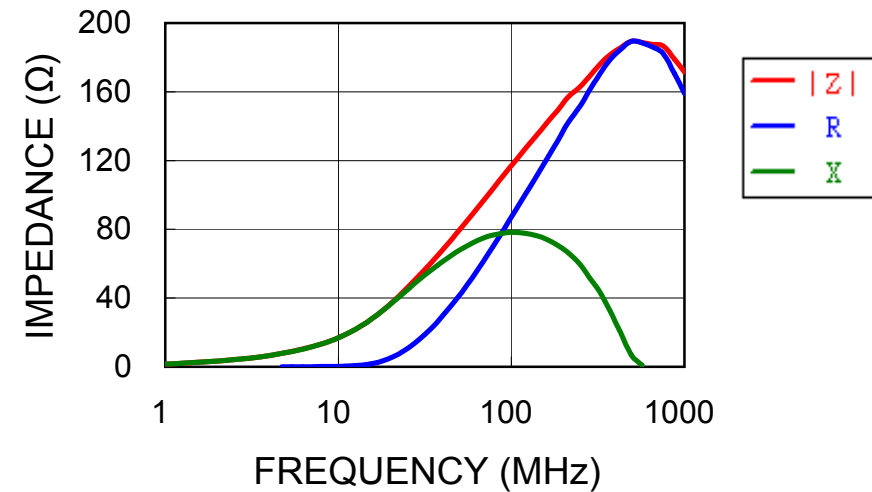

N006	0.10 Ω / 800 mA			Multilayer Ferrite Chip Beads	
N005	0.20 Ω / 400 mA				
N004	0.10 Ω / 600 mA				
N003	0.20 Ω / 250 mA				
N002	0.15 Ω / 600 mA				
N000	0.20 Ω / 200 mA				
Ver.	DESCRIPTION	DATE	BY	P/N	TB 160808 U121
				Version	N000



+886-3-4962286
www.tecstar.com.tw