




Physical Dimensions : mm (inch)

- A = 1.6±0.2 (0.063±0.008)
- B = 0.8±0.2 (0.031±0.008)
- C = 0.8±0.2 (0.031±0.008)
- D = 0.3±0.2 (0.012±0.008)

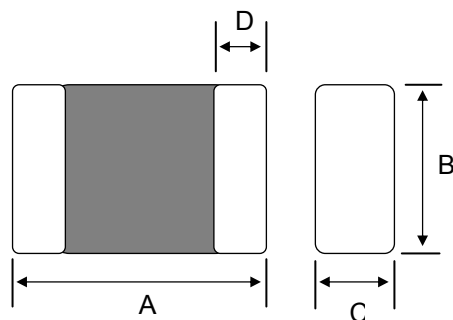

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	300	Ω	± 25%	100 MHz / 100 mV
RDC	0.35	Ω	max.	
IDC	200	mA	max.	


Packing Method:

- One Reel = 4,000 pcs
- One Box = 200,000 pcs
- One Box = 9.9 KG

General information :

- Operating Temperature: -55°C to 125°C
- Storage Temperature (on Tape & Reel): 40 max, 70% RH
- Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

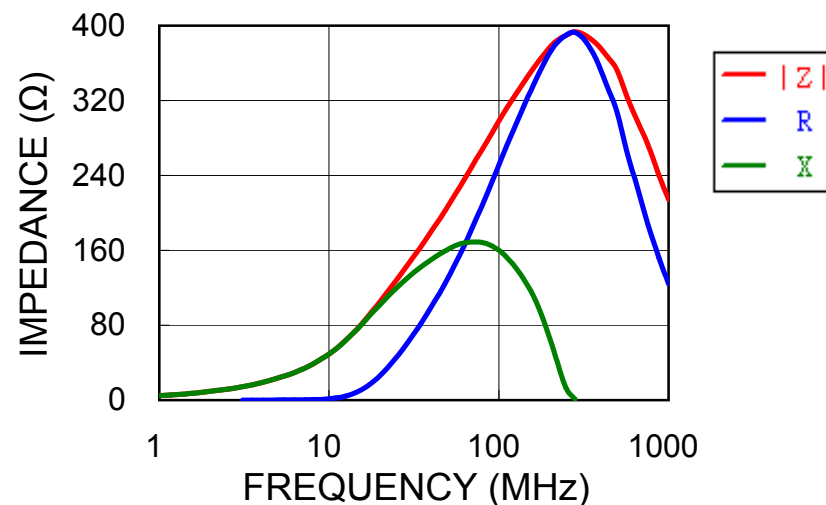

				Multilayer Ferrite Chip Beads	
N004	0.25 Ω / 900 mA			P/N	TB 160808 U301
N003	0.25 Ω / 500 mA				
N002	0.25 Ω / 400 mA			Version	N000
N001	0.35 Ω / 300 mA				
N000	0.35 Ω / 200 mA				
Ver.	DESCRIPTION	DATE	BY		



+886-3-4962286
www.tecstar.com.tw