




Physical Dimensions : mm (inch)

A =  $2.0 \pm 0.2$  (0.079 $\pm$ 0.008)

B =  $1.2 \pm 0.2$  (0.047 $\pm$ 0.008)

C =  $0.9 \pm 0.2$  (0.035 $\pm$ 0.008)

D =  $0.5 \pm 0.3$  (0.020 $\pm$ 0.012)

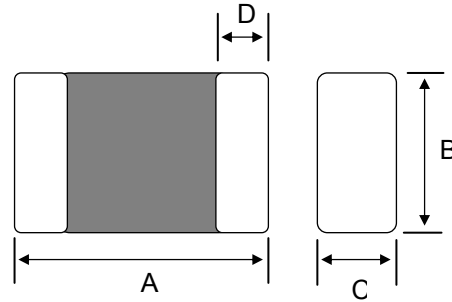

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	300	$\Omega$	$\pm 25\%$	100 MHz / 100 mV
RDC	0.05	$\Omega$	max.	
IDC	2500	mA	max.	

Packing Method:

One Reel = 4,000 pcs

One Box = 200,000 pcs

One Box = 10.7 KG


General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

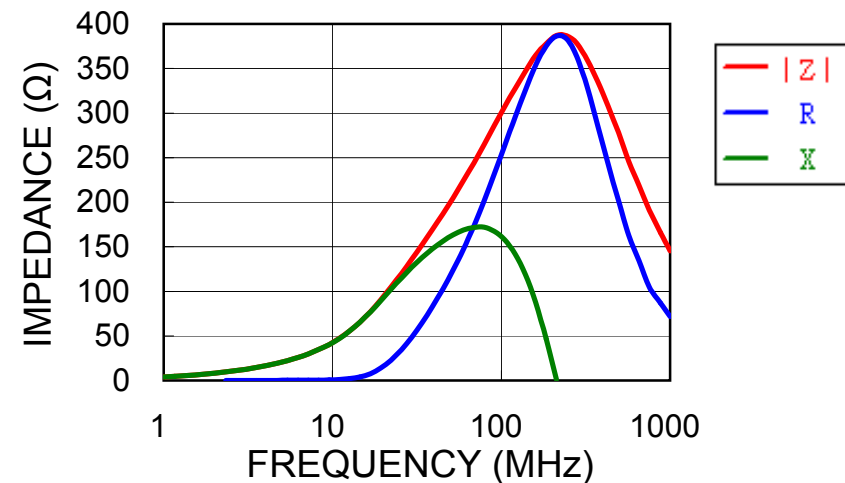

				Multilayer Ferrite Chip Beads	
N003	0.04 $\Omega$ / 3000 mA			P/N	TI 201209 U301
N002	0.05 $\Omega$ / 3000 mA				
N001	0.10 $\Omega$ / 2500 mA			Version	N000
N000	0.05 $\Omega$ / 2500 mA				
Ver.	DESCRIPTION	DATE	BY		



+886-3-4962286  
www.tecstar.com.tw