



Physical Dimensions : mm (inch)

A = 3.2 ± 0.2 (0.126 \pm 0.008)

B = 1.6 ± 0.2 (0.063 \pm 0.008)

C = 1.1 ± 0.2 (0.043 \pm 0.008)

D = 0.5 ± 0.3 (0.020 \pm 0.012)



Electrical Characteristics :

| | Value | Unit | Tol. | Test Condition |
|-----|-------|----------|------------|------------------|
| Z | 60 | Ω | $\pm 25\%$ | 100 MHz / 100 mV |
| RDC | 0.03 | Ω | max. | |
| IDC | 3000 | mA | max. | |

Packing Method:

One Reel = 3,000 pcs

One Box = 150,000 pcs

One Box = 9.2 KG


General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

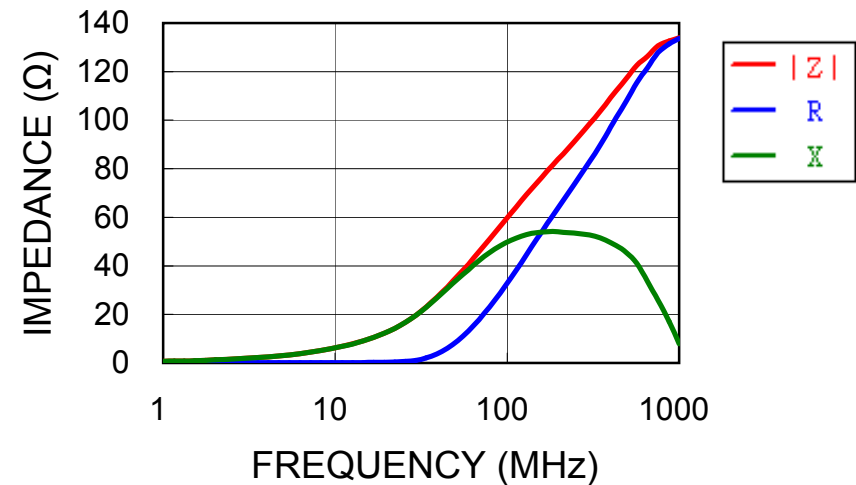

| | | | | Multilayer Ferrite Chip Beads | |
|------|-------------------------|------|----|-------------------------------|----------------|
| | | | | P/N | TI 321611 G600 |
| N000 | 0.03 Ω / 3000 mA | | | Version | N000 |
| Ver. | DESCRIPTION | DATE | BY | | |



+886-3-4962286
www.tecstar.com.tw