




Physical Dimensions : mm (inch)

A = 3.2 ± 0.2 (0.126 \pm 0.008)

B = 1.6 ± 0.2 (0.063 \pm 0.008)

C = 1.1 ± 0.2 (0.043 \pm 0.008)

D = 0.5 ± 0.3 (0.020 \pm 0.012)

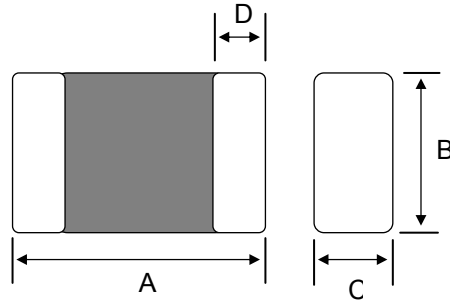

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	300	Ω	$\pm 25\%$	100 MHz / 100 mV
RDC	0.05	Ω	max.	
IDC	2500	mA	max.	

Packing Method:

One Reel = 3,000 pcs

One Box = 150,000 pcs

One Box = 9.2 KG


General information :


Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

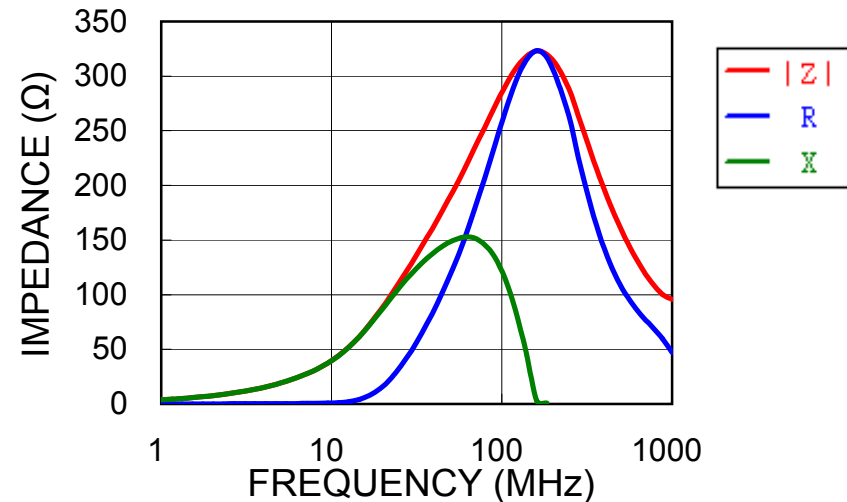

				Multilayer Ferrite Chip Beads		 +886-3-4962286 www.tecstar.com.tw
N003	0.04 Ω / 3000 mA			P/N	TI 321611 U301	
N002	0.05 Ω / 3000 mA					
N001	0.10 Ω / 2500 mA			Version	N000	
N000	0.05 Ω / 2500 mA					
Ver.	DESCRIPTION	DATE	BY			