

# SPECIFICATION FOR APPROVAL

CUSTOMER \_\_\_\_\_

CUSTOMER'S DWG NO. \_\_\_\_\_

REVISION NO. \_\_\_\_\_

CUSTOMER'S PART NO. \_\_\_\_\_

TECSTAR'S PART NO

TL201209-R27K \_\_\_\_\_

QUANTITY \_\_\_\_\_

PCS. \_\_\_\_\_

ITEM. \_\_\_\_\_

DATE

SEP/03/2009 \_\_\_\_\_

	“ ”	CUSTOMER'S SIGNATURE	NOTE
FULL APPROVED			
CONDITONAL APPROVED			
REJECTED			



## TECSTAR TECHNOLOGY CO., LTD.

NO. 820-1 Kou Shih Rd. Yang Mei Chen


Taoyuan Hsien, Taiwan, R.O.C.

TEL : 886-3-4788701

FAX : 886-3-4788702

www [tecstar.com.tw](http://tecstar.com.tw)

# SPECIFICATION FOR APPROVAL

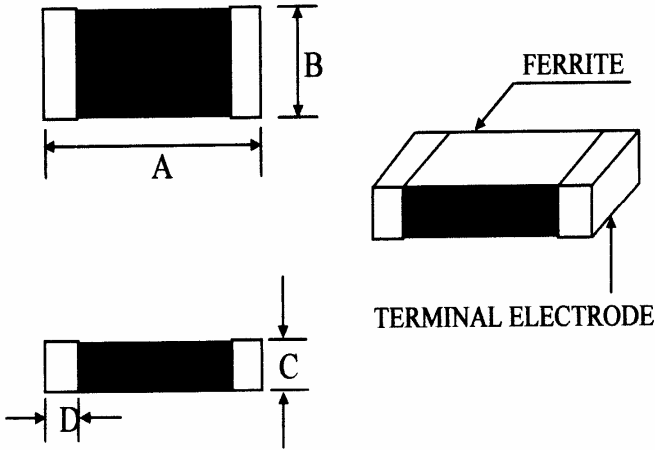CUSTOMER:		CUSTOMER'S P/N:		
VENDOR'S P/N:		TL201209-R27K		
<p>DIMENSION:(m/m)</p> 		A	2.0 ± 0.2	m/m
		B	1.2 ± 0.2	m/m
		C	0.9 ± 0.2	m/m
		D	0.5 ± 0.3	m/m
		E		m/m
		F		m/m
		G		m/m
		H		m/m
		I		m/m
		J		m/m
		K		m/m
		L		m/m
		M		m/m
		N		m/m
O		m/m		
<b>ELECTRICAL REQUIREMENTS</b>		<b>TEST INSTRUMENTS</b>		
L	270 ± 10% nH	TEST FREQ.	HP 4338A MILLIOHMMETER HP 4195A NETWORK/SPECTRUM ANALYZER HP 4284A BIAS CURRENT SOURCE HP 4285A PRECISION LCR METER HP 4286A PRECISION LCR METER HP 4291B RF IMPEDANCE /MATERIAL ANALYZER HP 6632A DC POWER SUPPLY	
Q	20 MIN.	TEST FREQ.		
Srf	150 MHz MIN.	TEST FREQ.		
Rdc	0.50 OHM. MAX.	TEST FREQ.		
Idc	250 mA MAX.	TEST FREQ.		
DRAWN BY		CHECKED BY		APPROVED BY
Juli Wang		John Chuang		Lionel Lin

# TEST DATA

CUSTOMER:							
CUSTOMER'S P/N:						SERIES NO:	TL2622
VENDOR'S P/N:		TL201209-R27K				DATE:	03-SEP-2009
MEAS	A	B	C	D	L	Q	Rdc
ITEM	(m/m)	(m/m)	(m/m)	(m/m)	(nH)		( $\Omega$ )
SPEC	$2.0 \pm 0.2$	$1.2 \pm 0.2$	$0.9 \pm 0.2$	$0.5 \pm 0.3$	$270 \pm 10\%$	20 MIN.	0.50 MAX.
TEST FREQ.					25 MHz	25 MHz	
1	2.03	1.20	0.90	0.49	267.0	65.0	0.171
2	2.01	1.22	0.90	0.50	279.3	67.4	0.170
3	2.04	1.22	0.91	0.50	265.6	67.6	0.170
4	2.02	1.20	0.92	0.49	275.9	69.2	0.178
5	2.00	1.20	0.90	0.50	287.0	69.1	0.169
6	2.00	1.22	0.90	0.50	254.1	60.5	0.176
7	2.04	1.19	0.90	0.52	274.6	69.5	0.170
8	2.01	1.22	0.92	0.49	258.1	64.0	0.169
9	2.02	1.21	0.92	0.52	273.9	70.3	0.163
10	2.02	1.20	0.92	0.50	278.2	69.2	0.169
AVG.	2.02	1.21	0.91	0.50	271.4	67.2	0.171
R	0.04	0.03	0.02	0.03	32.9	9.8	0.015
DRAWN BY			CHECKED BY			APPROVED BY	
Juli Wang			John Chuang			Lionel Lin	

# MULTILAYER CHIP INDUCTORS


## TL Series (Ferrite)




### TL Series (Ferrite)

#### 2012 TYPE


INDUCTANCE vs. FREQUENCY  
CHARACTERISTICS

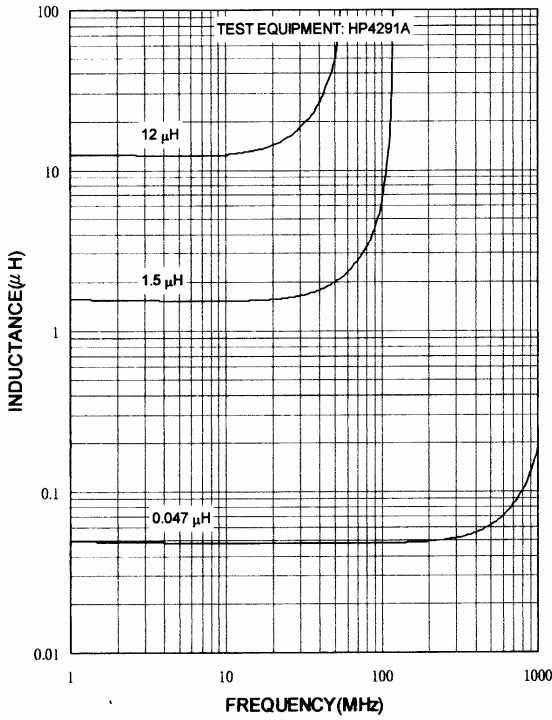


IMPEDANCE vs. FREQUENCY  
CHARACTERISTICS

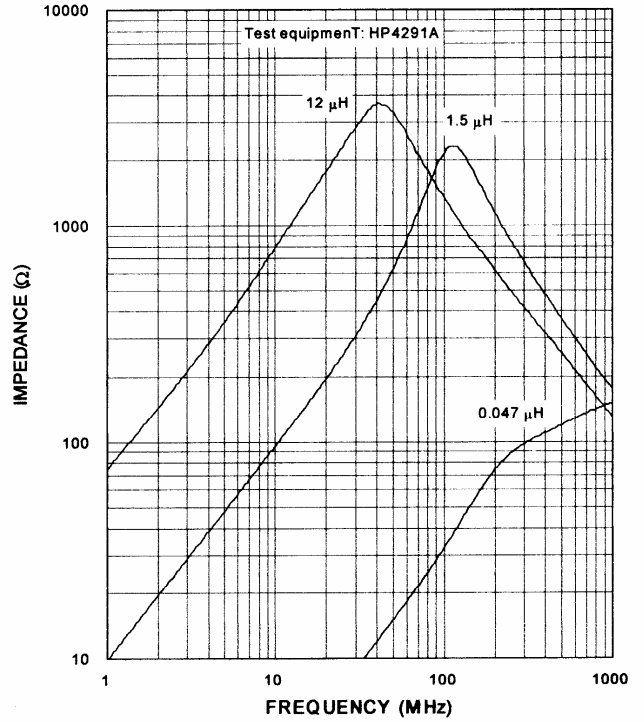

INDUCTANCE vs. TEMPERATURE  
CHARACTERISTICS

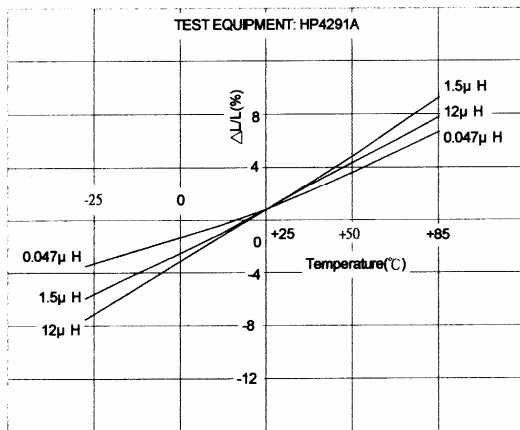

Q vs. FREQUENCY CHARACTERISTICS

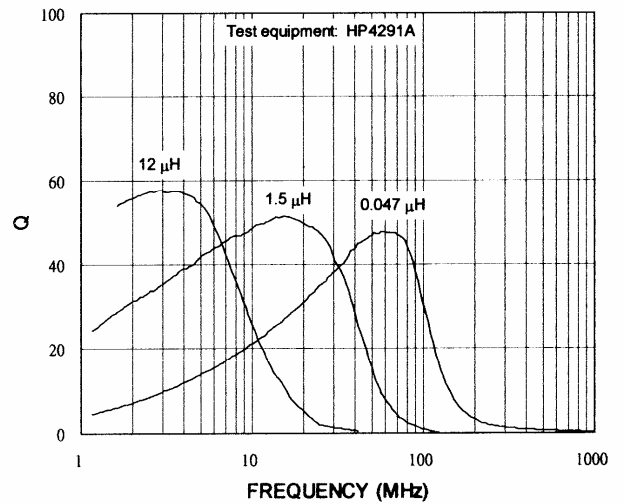


# RELIABILITY TEST

Item	Performance	Test condition
Operating temperature range	-55 °C to + 125 °C	
Storage temperature and umidity ranges	40 °C MAX., 70% RH MAX.	
Soldering heat resistance	The chip shall not be cracks. More than 75% of terminal electrode shall be covered with solder.	Preheat: 150 °C, 60 seconds Solder temperature : 260 ± 5 °C Flux: Rosin Dip time: 10 ± 1 seconds
Solderability	More than 90% of the terminal electrode shall be covered with new solder.	Preheat: 150 °C, 60 seconds Solder temperature: 245 ± 5 °C Flux: Rosin Dip time: 4 ± 1 seconds

## Recommended Soldering Conditions

(REFLOW TEMPERATURE PROFILE) **Lead-Free**

A	$260 \pm 5$
B	$230 \pm 5$
C	$30 \pm 10 \text{ sec}$
D	150
E	180
F	$90 \pm 30 \text{ sec}$

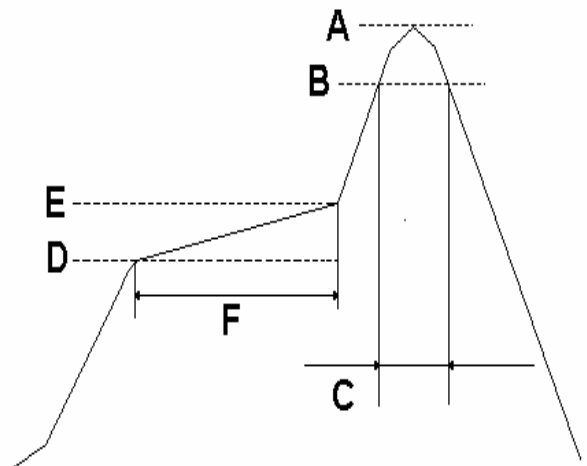

# RELIABILITY TEST

Terminal strength


The terminal electrode and the body shall not be damaged by the forces applied on the right conditions.



Type	P (kgf)	Time (s)
T□100505	0.3	
T□160808	0.5	
T□201209	0.6	
T□201212	0.8	
T□321611	1.0	
T□322513	1.0	30 ± 5
T□451616	1.0	
T□453215	1.5	
TA3216M4	0.5	





Bending strength

The body shall not be damaged by the forces applied on the right conditions.




Type	A (mm)	P (kgf)
T□160808	1.0	0.5
T□201209	1.4	1.0
T□201212	1.4	1.2
T□321611	2.0	2.0
T□322513	2.0	2.5
T□451616	2.5	2.5
T□453215	2.7	2.5
TA3216M4	1.4	1.0

# RELIABILITY TEST

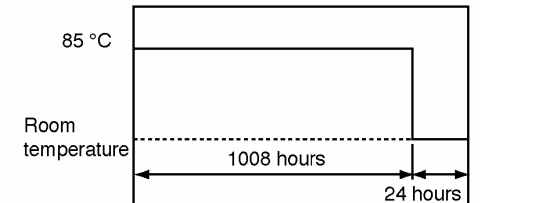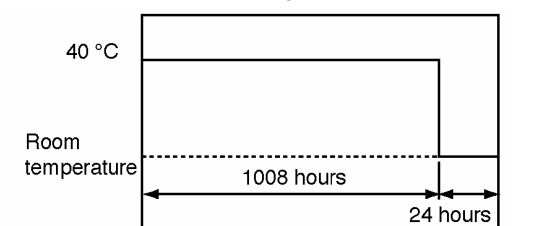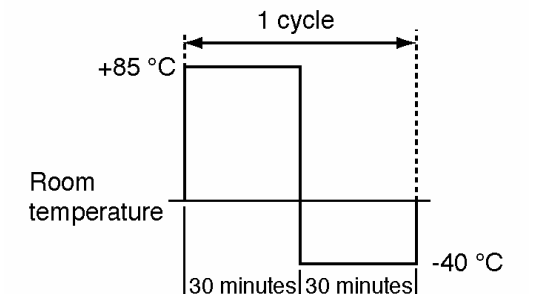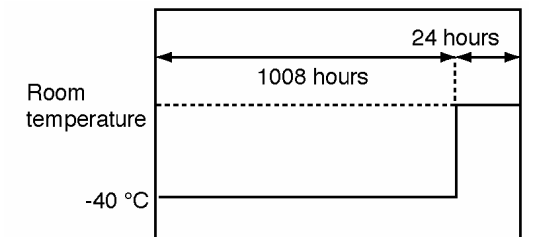Item	Performance	Test condition
High temperature resistance	Appearance : Ferrite shall not be damaged. Inductance : Within±10% of the initial value. Q: Within±30% of the initial value.	Temperature: 85±2 Testing time: 1008±12 hours Measurement: After placing for 24 hours min 
Humidity resistance	Appearance: Ferrite shall not be damaged. Inductance: Within±10% of the initial value Q: Within±30 % of the initial value.	Humidity: 90 to 95% RH Temperature: 40±2 Testing time: 1008±12 hours Measurement: After placing for 24 hours min 
Thermal Shock	Appearance: Cracking, chipping or any other defects harmful to the characteristics shall not be allowed.  Inductance: Within±10% of the initial value Q: Within±30% of the initial value.	Temperature: -40 , +85 , kept stabilized for 30 minutes each Cycle: 100 cycles Measurement: After placing for 24 hours min 
Low temperature storage life test	Appearance: Cracking, chipping or any other defects harmful to the characteristics shall not be allowed. Inductance: Within±10% of the initial value. Q: Within±30% of the initial value.	Temperature: -40±2 Testing time: 1008±12 hours Measurement: After placing for 24 hours min 

# PACKAGING


- Tape dimensions and packaging quantities

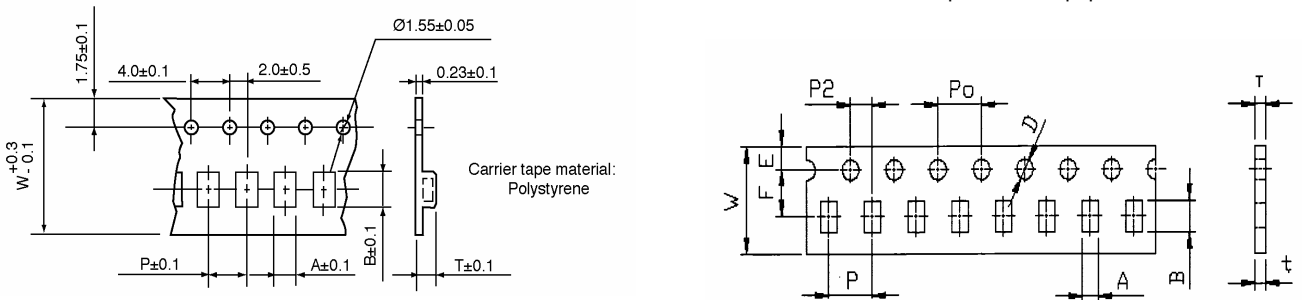

material: Paper ( Dimensions in mm)						
TYPE	A	B	W	P	T	CHIPS / REEL
100505	0.62	1.12	8	2	0.60	10000
160808	1.10	1.90	8	4	0.95	4000
201209	1.50	2.30	8	4	0.95	4000
material: Polystyrene ( Dimensions in mm)						
TYPE	A	B	W	P	T	CHIPS / REEL
160808	1.01	1.80	8	4	1.02	4000
201209	1.42	2.25	8	4	1.04	4000
201212	1.50	2.35	8	4	1.45	2000
321611	1.88	3.50	8	4	1.27	3000

- Reel dimensions

Material: Paper, Plastic

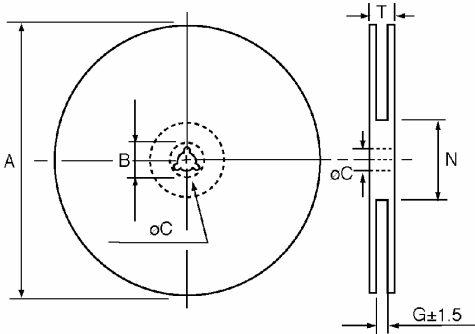

Dimensions in mm

TYPE	8mm	12mm
A	178±2	178±2
B	21.0±0.8	21.0±0.8
C	13.0±0.8	13.0±0.8
G	10.0	14.0
N	75	75
T	12.5	16.5

