




Physical Dimensions : mm (inch)

A = 1.6 ± 0.2 (0.063 \pm 0.008)

B = 0.8 ± 0.2 (0.031 \pm 0.008)

C = 0.8 ± 0.2 (0.031 \pm 0.008)

D = 0.3 ± 0.2 (0.012 \pm 0.008)

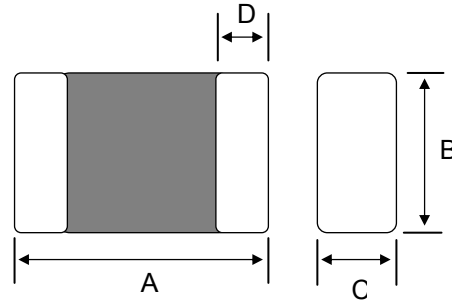

General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	60	Ω	$\pm 25\%$	100 MHz / 100 mV
RDC	0.20	Ω	max.	
IDC	300	mA	max.	


Packing Method:


One Reel = 4,000 pcs

One Box = 200,000 pcs

One Box = 9.9 KG

Typical Impedance Characteristics : HP 4291B

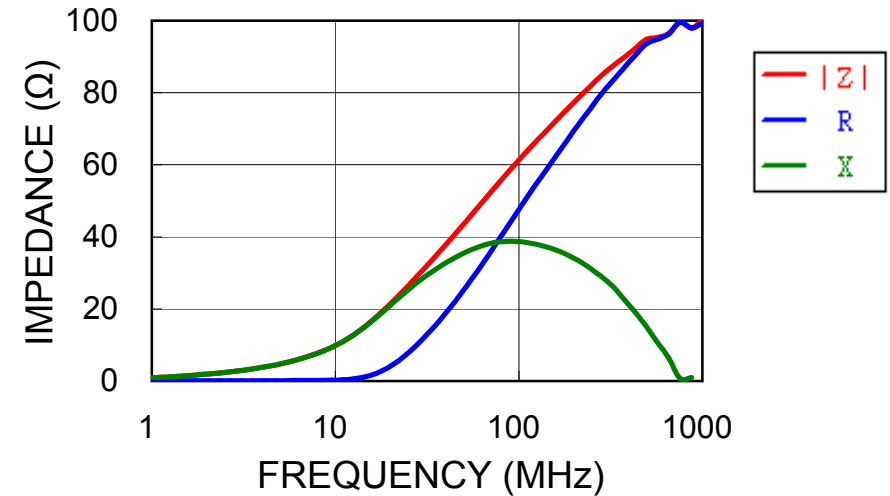

				Multilayer Ferrite Chip Beads		 +886-3-4962286 www.tecstar.com.tw
N004	0.10 Ω / 800 mA			P/N	TB 160808 U600	
N002	0.15 Ω / 400 mA					
N001	0.20 Ω / 700 mA					
N000	0.20 Ω / 300 mA					
Ver.	DESCRIPTION	DATE	BY	Version	N000	