




Physical Dimensions : mm (inch)

A = 2.0 ± 0.2 (0.079 \pm 0.008)

B = 1.2 ± 0.2 (0.047 \pm 0.008)

C = 0.9 ± 0.2 (0.035 \pm 0.008)

D = 0.5 ± 0.3 (0.020 \pm 0.012)

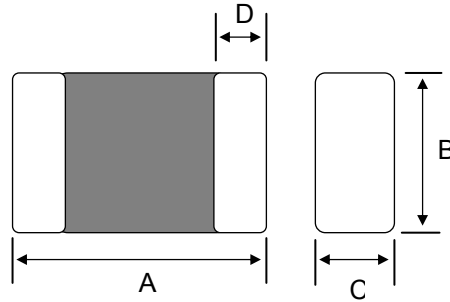

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	80	Ω	$\pm 25\%$	100 MHz / 100 mV
RDC	0.10	Ω	max.	
IDC	3000	mA	max.	

Packing Method:

One Reel = 4,000 pcs

One Box = 200,000 pcs

One Box = 10.7 KG


General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

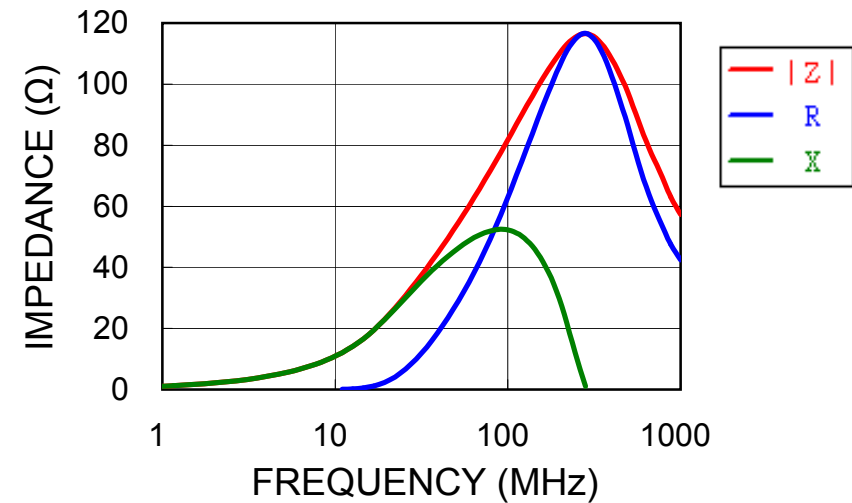

N006	0.02 Ω / 6000 mA		
N005	0.04 Ω / 3000 mA		
N004	0.05 Ω / 5000 mA		
N003	0.02 Ω / 5000 mA		
N002	0.05 Ω / 4000 mA		
N001	0.06 Ω / 3000 mA		
N000	0.10 Ω / 3000 mA		
Ver.	DESCRIPTION	DATE	BY

Multilayer Ferrite Chip Beads

P/N

TI 201209 U800

Version

N000



+886-3-4962286

www.tecstar.com.tw