




Physical Dimensions : mm (inch)

A =  $3.2 \pm 0.2$  (0.126 $\pm$ 0.008)

B =  $1.6 \pm 0.2$  (0.063 $\pm$ 0.008)

C =  $1.1 \pm 0.2$  (0.043 $\pm$ 0.008)

D =  $0.5 \pm 0.3$  (0.020 $\pm$ 0.012)

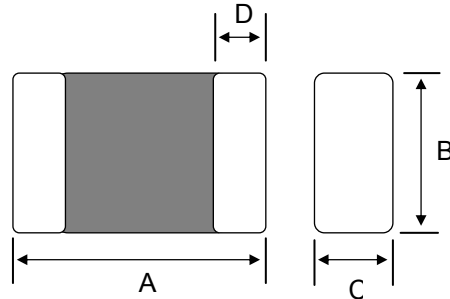

Electrical Characteristics :

	Value	Unit	Tol.	Test Condition
Z	120	$\Omega$	$\pm 25\%$	100 MHz / 100 mV
RDC	0.04	$\Omega$	max.	
IDC	3000	mA	max.	

Packing Method:

One Reel = 3,000 pcs

One Box = 150,000 pcs

One Box = 9.2 KG


General information :

Operating Temperature: -55°C to 125°C

Storage Temperature (on Tape & Reel): 40 max, 70% RH

Test conditions of Electrical Properties: 30 max, 70% RH

Typical Impedance Characteristics : HP 4291B

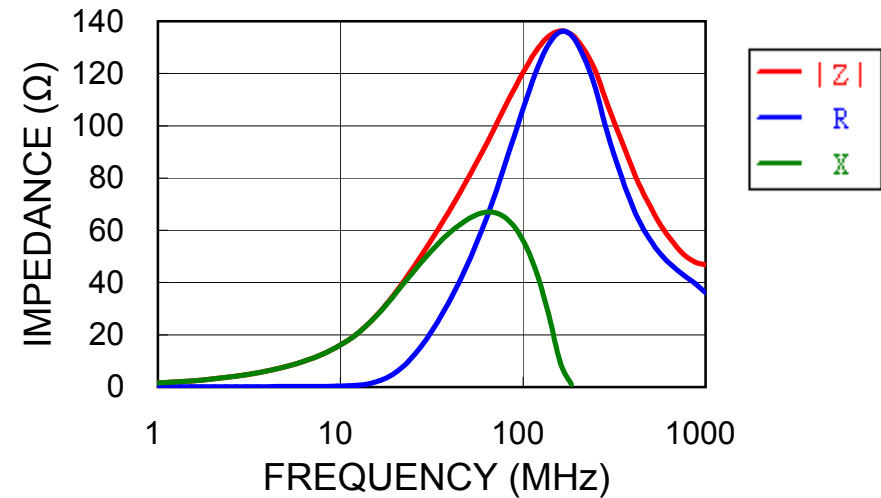

N008	0.025 $\Omega$ / 3000 mA		
N007	0.02 $\Omega$ / 6000 mA		
N006	0.03 $\Omega$ / 4000 mA		
N005	0.03 $\Omega$ / 3000 mA		
N003	0.015 $\Omega$ / 6000 mA		
N002	0.04 $\Omega$ / 4000 mA		
N001	0.05 $\Omega$ / 3000 mA		
N000	0.04 $\Omega$ / 3000 mA		
Ver.	DESCRIPTION	DATE	BY

Multilayer Ferrite Chip Beads

P/N

TI 321611 U121

Version

N000



+886-3-4962286

www.tecstar.com.tw